



IF IN DOUBT PL ASK!

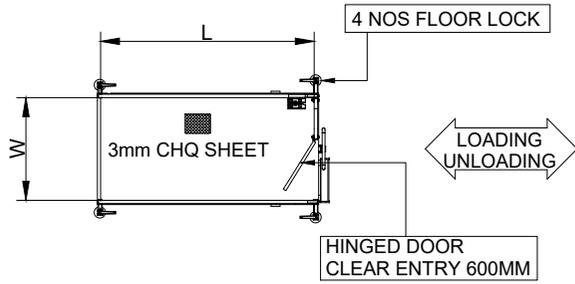


OPERATING PENDANT


3 SIDE BOLTED RAILING (SQ. TUBE 32x32)

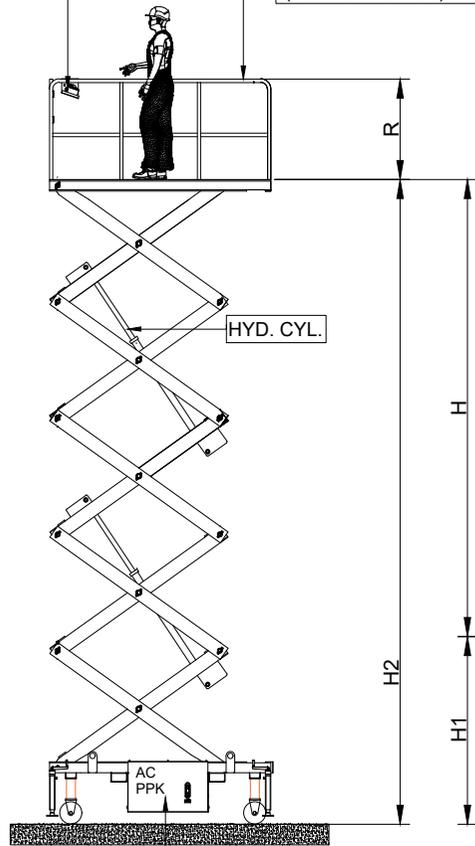

H
H2

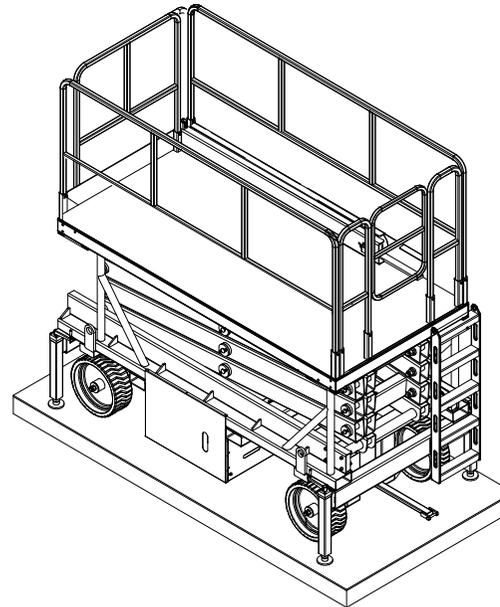


3D VIEW ONLY FOR REF.

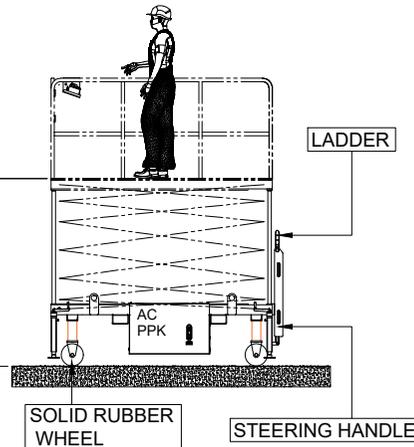

SR	MATERIAL DESCRIPTION	MAKE
1	CONTACTOR	SCHNEIDER
2	SMPS	NHP
3	LIMIT SWITCH	JAY BALAJI
4	PUSH BUTTON	TEKNIK
5	MPCB	SCHNEIDER
6	MOTOR	IMPORTED (TARGET / EQUIVALENT)
7	CABLE	POLYCAB
8	TERMINALS	CONNECTWELL
9	PUSH BUTTON BOX AND PANEL	INHOUSE

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	500 KGS
2	PLATFORM LENGTH	L	2500
3	PLATFORM WIDTH	W	1200
4	POWERPACK	HP	3 HP
5	MIN HEIGHT	H1	1800
6	MAXIMUM HEIGHT	H2	10000
7	LIFT HEIGHT	H	8200
8	RAILING	R	900

1	MOC	M.S	
	FINISH	FRAME	GOLDEN YELLOW ENAMEL PAINT
		SCISSOR	GRAY ENAMEL PAINT
2	LIFT OPERATION	INCHING MODE	
3	LOAD CONSIDERED	UNIFORMLY DISTRIBUTED	
4	USABLE AREA	2400 L x 1100 W (APPROX)	
5	OVERALL M/C DIMN	2800 L X 1500 W X 3000H (APPROX)	
6	LIFTING SPEED	2.5-3 M/MIN (APPROX.)	
7	A-THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.		
8	MOVEMENT SPEED	MANUAL PULL PUSH WITH 2-3 PEOPLE	
9	AUDIO-VISUAL ALARM ON BOTTOM FRAME		
10	LOCATION-INDOOR		

REV.NO.	DESCRIPTION	DATE	DRAWN	CHECK	APP
00					
CUSTOMER-			ALL DIMENSIONS ARE IN mm. A4		
 Lucrative Material Handling Industries		CO.NO	PRODUCT.NO.		
		DRAWN	AMITA	01.04.2025	
		CHECKED	SANTOSH	01.04.2025	
TITLE		APPROVED	PRATIK	01.04.2025	
		 SCALE : NTS			
DRAWING NO.	OCT24-J05-1	SHEET NO.	1-1	REV.	R0

ELE. HYD. SCISSOR LIFT.