

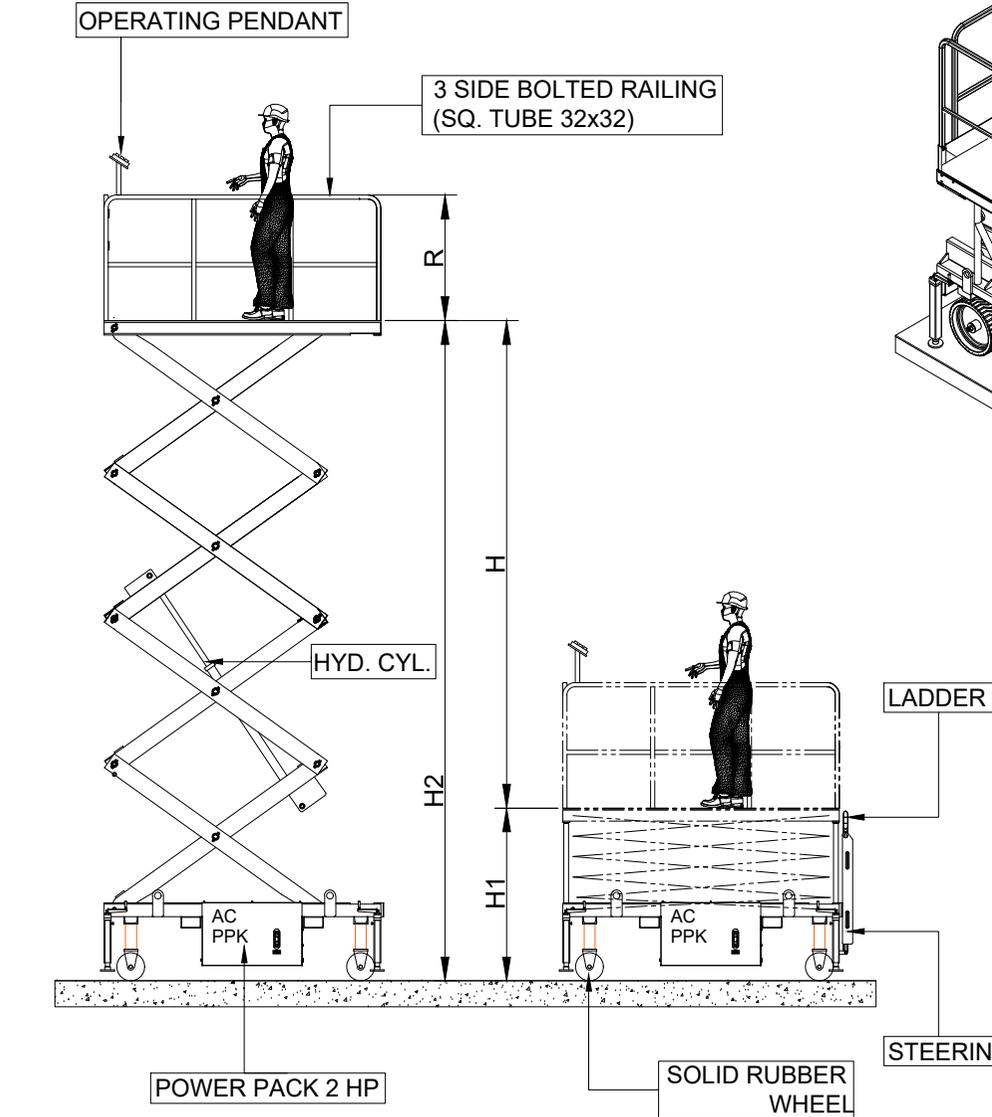


IF IN DOUBT PL ASK!

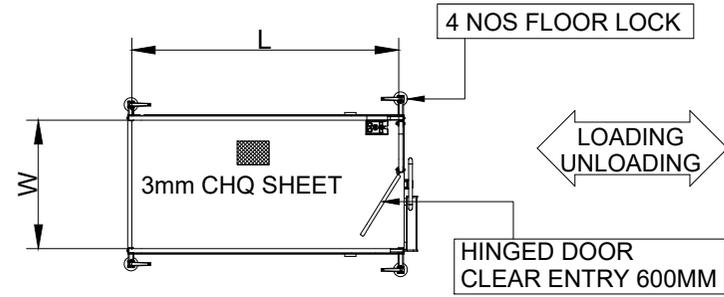

SR	MATERIAL DESCRIPTION	MAKE
1	CONTACTOR	SCHNEIDER
2	SMPS	NHP
3	LIMIT SWITCH	JAY BALAJI
4	PUSH BUTTON	TEKNIK
5	MPCB	SCHNEIDER
6	MOTOR	IMPORTED (TARGET / EQUIVALENT)
7	CABLE	POLYCAB
8	TERMINALS	CONNECTWELL
9	PUSH BUTTON BOX AND PANEL	INHOUSE

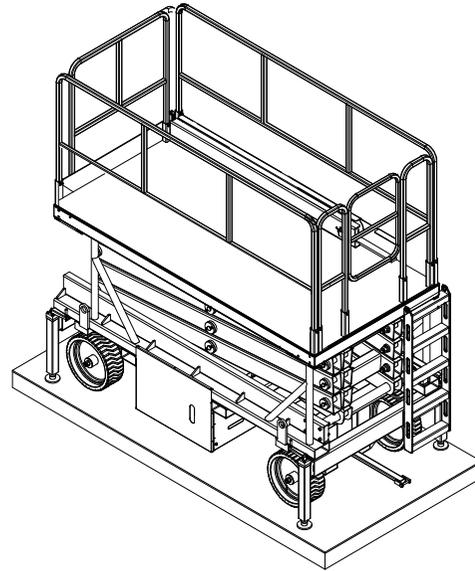

3D VIEW ONLY FOR REF.

SR	PARAMETERS	SYMBOL	SPECIFICATION
1	CAPACITY	C	500 KGS
2	PLATFORM LENGTH	L	1850
3	PLATFORM WIDTH	W	1000
4	POWERPACK	HP	2 HP
5	MIN HEIGHT	H1	1200
6	MAXIMUM HEIGHT	H2	6000
7	LIFT HEIGHT	H	4800
8	RAILING	R	900

1	MOC	M.S	
	FINISH	FRAME	GOLDEN YELLOW ENAMEL PAINT
		SCISSOR	GRAY ENAMEL PAINT
2	LIFT OPERATION	INCHING MODE	
3	LOAD CONSIDERED	UNIFORMLY DISTRIBUTED	
4	USABLE AREA	1750 L x 900 W (APPROX)	
5	OVERALL M/C DIMN	2150 L X 1300 W X 2400H (APPROX)	
6	LIFTING SPEED	2-2.5 M/MIN (APPROX.)	
7	A-THIS IS SCHEMATIC REPRESENTATION ONLY, ACTUAL MACHINE MAY VARY SLIGHTLY.		
8	MOVEMENT SPEED	MANUAL PULL PUSH WITH 2-3 PEOPLE	
9	AUDIO-VISUAL ALARM ON BOTTOM FRAME		
10	LOCATION-INDOOR		

REV.NO.	DESCRIPTION	DATE	DRAWN	CHECK	APP
00					
CUSTOMER-			ALL DIMENSIONS ARE IN mm. A4		
 Lucrative Material Handling Industries			CO.NO	PRODUCT.NO.	
			DRAWN	AMITA	01.04.2025
			CHECKED	SANTOSH	01.04.2025
			APPROVED	PRATIK	01.04.2025
TITLE			ELE. HYD. SCISSOR LIFT.	SCALE :	NTS
DRAWING NO.	OCT24-J05-1	SHEET NO.	1-1	REV.	R0